




Product data sheet CT HYD 325

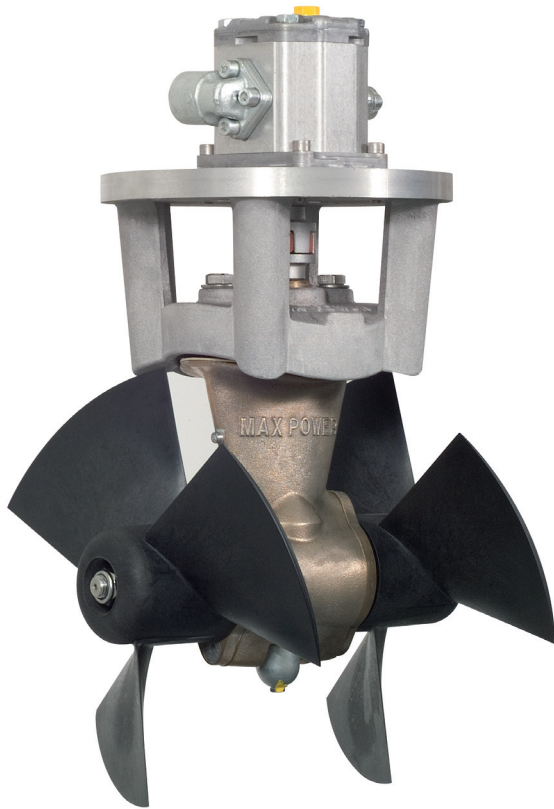

Details:

| | |
|---------------------------|----------|
| Product ref. CT325/250: | 317598 |
| Product ref. CT325/325: | 317599 |
| Typical boat size: | 52 - 85' |
| Tunnel diameter (inside): | 315mm |
| Tunnel thickness: | 9 - 10mm |
| Weight: | 24kg |

Performance data:

| Model | Max. thrust (kg/lbs): | Hydraulic Power: | Flow | Pressure |
|--------|-----------------------|------------------|-------|----------|
| 317598 | 250 / 551 | 14kw | 38lpm | 220bar |
| 317599 | 275 / 606 | 19kw | 45lpm | 250bar |

The twin propeller CT HYD 325 has a bronze (or aluminium) drive leg, and is available in 2 models the CT325/250 or the CT325/325. Currently the largest unit in the hydraulic tunnel thruster range, this model has a 315mm tunnel diameter, a thrust rating of up to 275 / 606 (kg/lbs) and integrates all the unique features of the range.

Unique Features:



Composite drive legs



Line shields



Zero maintenance



Case hardened spiro-conical gears



Branded hydraulic components



Water resistant



Unrivaled safety features

Control Panels:

Max Power's thruster control systems include a variety of **advanced safety features**.

- Childproof activation
- Automatic shutdown after 30 minutes of inactivity
- Visible and audible overheat warning
- Time delay switch between port and starboard thrust
- Software protection against short circuits

